


HEALPix C Subroutines Overview

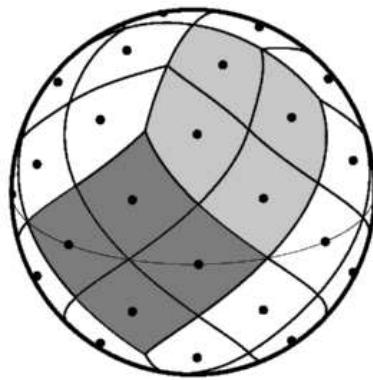

Revision: Version 2.15a; June 18, 2010

Prepared by: Eric Hivon, Anthony J. Banday, Matthias Bartelmann, Frode K. Hansen, Krzysztof M. Górski, Martin Reinecke and Benjamin D. Wandelt

Abstract: This document is an overview of the **HEALPix C** subroutines.

Contents

Conventions	3
Compilation and Installation	3
Usage	3
Note on the C routines	3
ang2vec	4
get_fits_size	5
nside2npix	7
pix2xxx, ang2xxx, vec2xxx, nest2ring, ring2nest	8
read_healpix_map	11
vec2ang	12
write_healpix_map	13

Conventions

Here we list some conventions which are used in this document.

N_{side} **HEALPix** resolution parameter — see the **HEALPix** Primer.

θ The polar angle or colatitude on the sphere, ranging from 0 at the North Pole to π at the South Pole.

ϕ The azimuthal angle on the sphere, $\phi \in [0, 2\pi[$.

Compilation and Installation

A tentative compilation and installation script is provided in `src/C/doinstall.s`. If it does not work, you can try editing the `src/C/subs/Makefile` by hand.

Usage

To use in your 'c' code, include the line

```
#include "chealpix.h"
```

in your code and link with something like

```
gcc -o myprog myprog.c -I<incdir> -L<libdir> -lchealpix
```

where `<incdir>` is where you've installed the '.h' files and `<libdir>` is where you've installed the libraries (See the header of the 'subs/Makefile').

You will also need the 'cfitsio' library. See <http://heasarc.gsfc.nasa.gov/docs/software/fitsio/>

Note on the C routines

This small set of C routines is provided as a start up kit to users wanting to link the **HEALPix** routines with some other languages (C, C++, IDL, perl, ...), and it was actually mainly provided by various users (see individual routines for details). As for the rest of the **HEALPix** package, all interested persons are welcome to contribute to this effort.

ang2vec

Location in HEALPix directory tree: `src/C/subs/ang2vec.c`

Routine to convert the position angles (θ, ϕ) of a point on the sphere into its 3D position vector (x, y, z) with $x = \sin \theta \cos \phi$, $y = \sin \theta \sin \phi$, $z = \cos \theta$.

FORMAT	void vec2ang(double theta, double phi, double *vector);
---------------	---

ARGUMENTS

name & dimensionality	kind	in/out	description
theta	double	IN	colatitude in radians measured southward from north pole (in $[0, \pi]$).
phi	double	IN	longitude in radians measured eastward (in $[0, 2\pi]$).
vector(3)	double	OUT	three dimensional cartesian position vector (x, y, z) . The north pole is $(0, 0, 1)$

RELATED ROUTINES

This section lists the routines related to **ang2vec**.

vec2ang	converts the 3D position vector of point into its position angles on the sphere.
---------	--

get_fits_size

Location in HEALPix directory tree: `src/C/subs/get_fits_size.c`

This routine reads the number of pixels, the resolution parameter and the pixel ordering of a FITS file containing a **HEALPix** map.

FORMAT	<code>long get_fits_size(char *filename, long *nside, char *ordering)</code>
--------	--

ARGUMENTS

name&dimensionality	kind	in/out	description
get_fits_size	long	OUT	number of pixels the FITS file
filename	char	IN	filename of the FITS-file containing the HEALPix map.
ordering	char	OUT	pixel ordering, either 'RING' or 'NESTED'
nside	long	OUT	Healpix resolution parameter Nside

EXAMPLE:

```
long npix, nside ;
char file[180] = 'map.fits' ;
char order[10] ;
npix= get_fits_size(file, &nside, order)
```

Returns in npix the number of pixel in the file 'map.fits', and read in nside or order its resolution parameter or ordering scheme

RELATED ROUTINES

This section lists the routines related to `get_fits_size`.

read_healpix_map
write_healpix_map

subroutine to read **HEALPix** maps
subroutine to write **HEALPix** maps

nside2npix

Location in HEALPix directory tree: `src/C/subs/nside2npix.c`

Function to provide the number of pixels N_{pix} over the full sky corresponding to resolution parameter N_{side} .

FORMAT `long nside2npix(const long nside)`

ARGUMENTS

name&dimensionality	kind	in/out	description
<code>nside</code>	long	IN	the N_{side} parameter of the map.
<code>nside2npix</code>	long	OUT	returns the number of pixels N_{pix} of the map $N_{\text{pix}} = 12N_{\text{side}}^2$.

EXAMPLE:

```
npix= nside2npix(256);
```

Returns the pixel the number of **HEALPix** pixels (786432) for the resolution parameter 256.

pix2xxx, ang2xxx, vec2xxx, nest2ring, ring2nest

Location in HEALPix directory tree: `src/C/subs/*.c`

These subroutines can be used to convert between pixel number in the **HEALPix** map and (θ, ϕ) coordinates on the sphere. This is only a subset of the routines equivalent in Fortran90 or in IDL.

Note: These routines are based on the translation of the original F77 routines to C++ and then to C, by Reza Ansari (ansari@lal.in2p3.fr), Alex Kim (akim@lilys.lbl.gov), Guy Le Meur (lemeur@lal.in2p3.fr), Benoit Revenu (revenu@iap.fr) and Ken Ganga (kmg@ipac.caltech.edu).

ARGUMENTS

name & dimensional- ity	type	in/out	description
nside	long	IN	N_{side} parameter for the HEALPix map.
ipnest	long	—	pixel identification number in NESTED scheme over the range $\{0, N_{pix} - 1\}$.
ipring	long	—	pixel identification number in RING scheme over the range $\{0, N_{pix} - 1\}$.
theta	double	—	colatitude in radians measured southward from north pole in $[0, \pi]$.
phi	double	—	longitude in radians, measured eastward in $[0, 2\pi]$.
vector	double	—	3D cartesian position vector (x, y, z) . The north pole is $(0, 0, 1)$. An output vector is normalised to unity.

ROUTINES:

```
void pix2ang_ring(long nside, long ipring, double *theta, double *phi);
    renders theta and phi coordinates of the nominal pixel center
    given the pixel number ipring and a map resolution parameter
    nside.
```

```
void pix2vec_ring(long nside, long ipring, double *vector);
    renders cartesian vector coordinates of the nominal pixel center
    given the pixel number ipring and a map resolution parameter
    nside. Optionally renders cartesian vector coordinates of the
    considered pixel four vertices.
```

```
void ang2pix_ring(long nside, double theta, double phi, long *ipring);
    renders the pixel number ipring for a pixel which, given the map
    resolution parameter nside, contains the point on the sphere at
    angular coordinates theta and phi.
```

```
void vec2pix_ring(long nside, double *vector, long *ipring);
    renders the pixel number ipring for a pixel which, given the map
    resolution parameter nside, contains the point on the sphere at
    cartesian coordinates vector.
```

```
void pix2ang_nest(long nside, long ipnest, double *theta, double *phi);
    renders theta and phi coordinates of the nominal pixel center
    given the pixel number ipnest and a map resolution parameter
    nside.
```

```
void pix2vec_nest(long nside, long ipnest, double *vector);
    renders cartesian vector coordinates of the nominal pixel center
    given the pixel number ipnest and a map resolution parameter
    nside. Optionally renders cartesian vector coordinates of the
    considered pixel four vertices.
```

```
void ang2pix_nest(long nside, double theta, double phi, long *ipnest);
    renders the pixel number ipnest for a pixel which, given the map
    resolution parameter nside, contains the point on the sphere at
    angular coordinates theta and phi.
```

```
void vec2pix_nest(long nside, double *vector, long *ipnest)
    renders the pixel number ipnest for a pixel which, given the map
    resolution parameter nside, contains the point on the sphere at
    cartesian coordinates vector.
```



```
void nest2ring(long nside, long ipnest, long *ipring);
```

performs conversion from NESTED to RING pixel number.

```
void ring2nest(long nside, long ipring, long *ipnest);
```

performs conversion from RING to NESTED pixel number.

MODULES & ROUTINES

This section lists the modules and routines used by **pix2xxx**, **ang2xxx**, **vec2xxx**, **nest2ring**, **ring2nest**.

<code>mk_pix2xy, mk_xy2pix</code>	routines used in the conversion between pixel values and “cartesian” coordinates on the Healpix face.
-----------------------------------	---

RELATED ROUTINES

This section lists the routines related to **pix2xxx**, **ang2xxx**, **vec2xxx**, **nest2ring**, **ring2nest**.

<code>ang2vec</code>	convert (θ, ϕ) spherical coordinates into (x, y, z) cartesian coordinates.
<code>vec2ang</code>	convert (x, y, z) cartesian coordinates into (θ, ϕ) spherical coordinates.

read_healpix_map

Location in HEALPix directory tree: `src/C/subs/read_healpix_map.c`

This routine reads a full sky **HEALPix** map from a FITS file

FORMAT	float *read_healpix_map(char *infile, long *nside, char *coordsys, char *ordering)
---------------	--

ARGUMENTS

name&dimensionality	kind	in/out	description
read_healpix_map	float	OUT	array containing the map read from the file
infile	char	IN	FITS file containing a full sky to be read
nside	long	OUT	HEALPix resolution parameter of the map
coordsys	char	OUT	astronomical coordinate system of pixelisation (either 'C', 'E' or 'G' standing respectively for Celestial=equatorial, Ecliptic or Galactic)
ordering	char	OUT	HEALPix pixel ordering (either 'RING' or 'NESTED')

RELATED ROUTINES

This section lists the routines related to **read_healpix_map**.

anafast	executable that reads a HEALPix map and analyses it.
synfast	executable that generate full sky HEALPix maps
write_healpix_map	subroutine to write HEALPix maps
get_fits_size	subroutine to determine the size of a map

vec2ang

Location in HEALPix directory tree: `src/C/subs/vec2ang.c`

Routine to convert the 3D position vector (x, y, z) of point into its position angles (θ, ϕ) on the sphere with $x = \sin \theta \cos \phi$, $y = \sin \theta \sin \phi$, $z = \cos \theta$.

FORMAT `void vec2ang(double *vector, double *theta,
double *phi);`

ARGUMENTS

name & dimensionality	kind	in/out	description
vector(3)	double	IN	three dimensional cartesian position vector (x, y, z) . The north pole is $(0, 0, 1)$
theta	double	OUT	colatitude in radians measured southward from north pole (in $[0, \pi]$).
phi	double	OUT	longitude in radians measured eastward (in $[0, 2\pi]$).

RELATED ROUTINES

This section lists the routines related to **vec2ang**.

ang2vec	converts the position angles of a point on the sphere into its 3D position vector.
---------	--

write_healpix_map

Location in HEALPix directory tree: `src/C/subs/write_healpix_map.c`

This routine writes a full sky **HEALPix** map into a FITS file

FORMAT	int write_healpix_map(float *signal, long nside, char *filename, char nest, char *coordsys)
---------------	---

ARGUMENTS

name&dimensionality	kind	in/out	description
write_healpix_map	int	OUT	returns a non zero value in case of error
signal	float	IN	full sky map to be written
nside	long	IN	HEALPix resolution parameter of the map (the map should have $12 * \text{nside} * \text{nside}$ pixels).
filename	char	IN	FITS file in which to write the full sky map
nest	char	IN	flag specifying the HEALPix pixel ordering of the map. 0: 'RING' and 1: 'NESTED'
coordsys	char	IN	astronomical coordinate system of map (must be either 'C', 'E' or 'G' standing respectively for Celestial=equatorial, Ecliptic or Galactic)

RELATED ROUTINES

This section lists the routines related to **write_healpix_map**.

anafast	executable that reads a HEALPix map and analyses it.
synfast	executable that generate full sky HEALPix maps
read_healpix_map	subroutine to read HEALPix maps
get_fits_size	subroutine to determine the size of a map
